


Pillowcase Kit

Fabrics Included:
3/4 yard main print
1/8 yard for trim
1/3 yard for band

lay fabric out flat

Assembly Instructions:

1. Trim the 1/8 yard of fabric to the desired width—2 1/2" was selected for the model.
2. Fold the trim in half lengthwise, wrong sides together, press.
3. Lay the main fabric right side up, raw edge on top of diagram, selvages down the sides.
4. Pin the trim piece to the right side of the main fabric, matching raw edges.
5. Pin the band fabric to above, right sides together, matching all raw edges.
- ✓ 6. From the opposite end (or bottom of the diagram) roll the edges of the main fabric up to the pinned area rolling it underneath the band fabric.
7. Take the long raw edge of the band fabric and fold it around the rolled up main fabric to the back side. The right side of the band fabric will now match the wrong side of the main fabric. Match the raw edges and pin in place.
8. Sew across the width over the pinned seam. This will form a tube.
9. Reach in the tube, pull out the main fabric.
10. Press well.
11. Sew the side seam with a French seam or serge. This raw seam outside, turn 1/8" inside.
12. Sew the end with a French seam or serge.

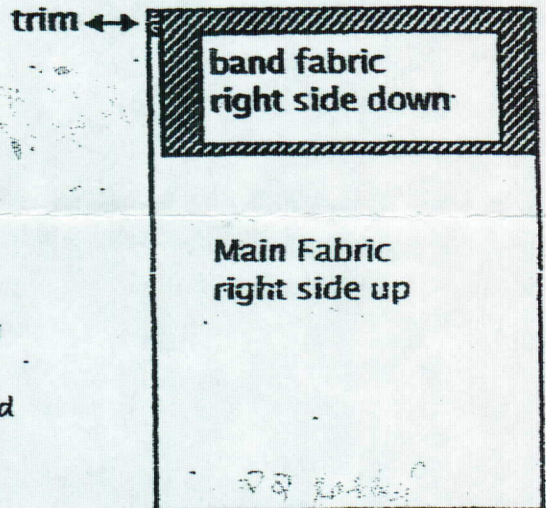

French Seam:

1. Match raw edges with wrong sides together.
2. Sew a 1/8" seam. It is important to sew a small seam.
3. Press well.
4. Fold along seam so that right sides are together, with raw edges inside.
5. Sew again, this time with a 1/4" - 3/8" seam.

Fold label in 1/2" + sew into final seam